



VD4 Microprocessor digital readouts

VD4 microprocessor panel readouts can read either analogue or digital signals. The following versions are available:



Complying with standards

Vcc	One voltage input channel. Input range: ± 2 Vdc, ± 20 Vdc, ± 200 Vdc
Vcc2R	One voltage input channel and 2 relay outputs
Lq	Input by potentiometer with resistance $1 \div 20$ KOhm
Lq2R	Input by potentiometer and 2 relay outputs
Icc	One direct current input channel. Input range ± 20 mA, ± 200 mA, ± 2 A (Configured at factory)
Icc2R	One direct current input channel and 2 relay outputs
Ica2R	One alternate current input channel. Input range: 2A. 2 relay outputs
F	Tachometer with digital input. Max Frequency 10 KHz

To allow the best visibility in any environmental condition, the values of the process variable are displayed on four 12.7 mm 7-segment red displays. The readout versions named with suffix 2R have two comparing alarms on the displayed variable. Each of them can be configured for \geq or \leq and for excitation type: steady or pulse one with settable time. The polyester flat keypad is used to enter the presets and the instrument set-up. The user friendly interface simplifies the daily use of the instrument, as well as the installing operation. A password protects the set-up phase from accidental access. Thanks to the excellent price/performance rate featuring this instrument series, VD4 readouts can be used for all those applications where visualization and control must be performed at a contained price level.

■ Technical specifications

Supply	24Vca or 115/230Vca $\pm 10\%$ 50/60 Hz 12Vcc/24Vdc.
Power requirement	4 VA max (version 24 / 115 / 230Vac) 2,5 Watt (version 12Vdc) 5 Watt (version 24Vdc)
Display type	4 digit 7-segment LED display 12.7 mm high
Data and preset saving	on FLASH memory
Display range*	-9999 /9999
Number of decimals	0,1 ,2 or 3, settable
Working temperature	0 \div 45 °C
Input reading resolution	4000 steps
Accuracy	0,2% of the input range
Conversions per second	140
Relay contacts type	Normally open 3A, 250Vac
Output delay*	35 ms
Output delay**	tachometer time base + 20mS
Front case protection degree	IP54
Digital input**	monodirectional, electronic type PNP or PUSH-PULL
Transducer supply**	12Vdc, 60mA max
Display range**	0-9999


* Except for type F ** For type F only

■ Application fields

Visualizers are commonly employed for different purposes.
The following list includes the most widespread applications:

- Pressure indicator.
- Sample items control.
- Sanding machine.
- Metal forming machines.
- Glass/marble working.
- Tachometer.

■ Dimensions

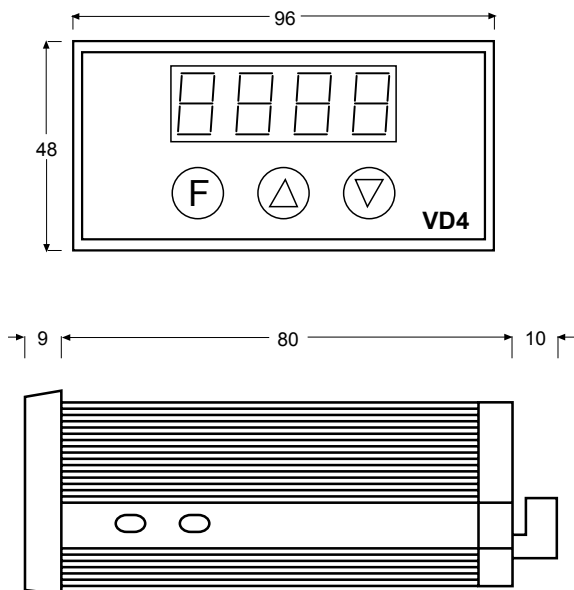

PANEL CUT OFF 91x44 mm

ALTHERIS bv

Scheveningseweg 15
2517 KS DEN HAAG
The Netherlands

+31 (0)70 3924421

+31 (0)70 3644249

Offices in : Benelux | Germany | France | UK | Italy | USA

www.altheris.com

sales@altheris.nl

LEADERS IN SENSORS & HEAVY DUTY JOYSTICKS

ALTHERIS
SENSORS & CONTROLS