




FTF311

Static Torque Transducer

We can manufacture static torque transducers with ranges between 2Nm and 1000Nm to your specific requirements.

For lower ranges please see the **FTF315**. If you fill in the blanks on the form below and send it to the Altheris sales department we will respond with a quotation, usually within 24 hours.

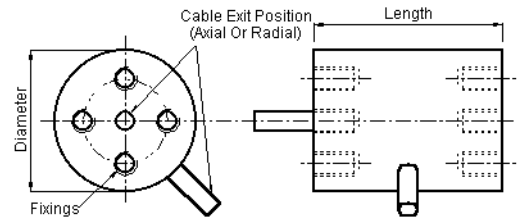

If the standard value for any parameter is suitable you can leave the field blank.

We need at least one contact number or email address to return the quotation!

Company	Tel	Quantity
Contact	Fax	
	Email	

Parameter	Value	Unit
Torque Range		Nm
Non - linearity - Terminal		%RT

■ Additional requirements

■ Typical specification

Parameter	Value	Unit
Zero load output	±4	% RT
Temperature effect on rated output per °C	±0.005	% AT
Temperature effect on zero load output per °C	±0.01	% RT
Temperature range - Compensated	-10 to +50	°C
Temperature range - Safe	-10 to +80	°C
Sealing	IP65	
Cable length	2	m

■ Notes

1. AT = Applied torque.
2. RT = Rated torque.
3. Temperature coefficients apply over the compensated range.

LEADERS IN SENSORS & HEAVY DUTY JOYSTICKS

ALThERIS bv

Scheveningseweg 15
 2517 KS DEN HAAG
 The Netherlands

+31 (0)70 3924421

+31 (0)70 3644249

Offices in : Benelux | Germany | France | UK | Italy | USA

www.altheris.com

sales@altheris.nl

