



FPM5100

Heavy Industrial Pressure Transducer

- CE Compliance
- Wide Temperature Range
- Compact



The FPM5100 series pressure transducers from the Microfused™ line, set a new price performance standard for demanding commercial and heavy industrial applications. This series is suitable for measurement of liquid or gas pressure, even for difficult media such as contaminated water, steam, and mildly corrosive fluids.

The transducer pressure cavity is machined from a solid piece of 17-4 PH stainless steel. The standard version includes a 1/4 NPT pipe thread allowing a leak-proof, all metal sealed system. There are no O-rings, welds or organics exposed to the pressure media. The durability is excellent. The FPM5100 exceeds the latest heavy industrial CE requirements including surge protection, and is over voltage protected to 16Vdc in both positive and reverse polarity.

This product is geared to the OEM customer who uses medium to high volumes. The standard version is suitable for many applications, but the dedicated design team at our Transducer Engineering Center stands ready to provide a semi-custom design where the volume and application warrants.

Features

- Heavy Industrial CE Approval
- 100 V/m EMI Protection
- Reverse Polarity Protection
- Extended Temperature Range
- 1% Total Error Band
- Compact Outline
- -40°C to +125°C Operating Temperature Range

Applications

- Advanced HVAC Systems
- Refrigeration Systems
- Automotive Test Stands
- Industrial Process Control
- Pumps and Compressors
- Hydraulic/Pneumatic Systems
- Agriculture Equipment
- Energy Generation and Management

■ Standard ranges

Range	psig	Range	Barg
0 to 50	•	0 to 3.5	•
0 to 100	•	0 to 7	•
0 to 200	•	0 to 10	•
0 to 300	•	0 to 20	•
0 to 500	•	0 to 35	•
0 to 1k	•	0 to 70	•
0 to 3k	•	0 to 200	•
0 to 5k	•	0 to 350	•
0 to 10k	•	0 to 700	•

DIN Range	Barg
0 to 4	•
0 to 6	•
0 to 10	•
0 to 16	•
0 to 25	•
0 to 40	•
0 to 60	•
0 to 100	•
0 to 160	•
0 to 250	•
0 to 400	•
0 to 600	•
0 to 1000	•

■ Performance specifications

Supply Voltage: 5.0V, Ambient Temperature: 25°C (unless otherwise specified)

PARAMETERS	MIN	TYP	MAX	UNITS	NOTES
Accuracy (combined non linearity, hysteresis, and repeatability)	-0.25		0.25	%Span	1
Long Term Stability (1 year)	-0.25		0.25	%Span	
Total Error Band (over compensated range)			±1	%Span	2
Compensated Temperature	-20		+85	°C	
Operating Temperature	-40		+125	°C	
Storage Temperature	-45		+125	°C	
Burst Pressure	5X			Rated	
Vibration (20 to 200Hz)	±20			g	3
Shock (11ms)	50			g	4
Pressure Cycles (Zero to Full Scale)	10			Million	
Pressure Overload	2X			Rated	
Weight		82.2		grams	
Media Compatibility	All Materials Compatible with 17-4 Stainless Steel				

For custom configurations, consult factory.

Notes

1. Best fit straight line.
2. TEB includes all accuracy errors, thermal errors, span and zero tolerances.
3. Per MIL-STD-810C, Procedure 514.2, Figure 514.2-2, Curve L.
4. 1/2 sine per MIL-STD 202F Method 213B condition A.

CE Compliance

EN55022 Emissions Class A & B

IEC61000

IEC61000

IEC61000

IEC61000

IEC61000

IEC61000

Pressure Port Options

2 = 1/4"-19 BSP Male

5 = 1/4"-18 NPT Male

F = 1/4"-19 BSP Female

Q = M10x1

S = M12x1.5

U = G1/4B DIN 3852

V = M14x1.5

Others available on request

Electrical Connection Options

1 = 2 ft cable

4 = Packard Metripak 150

5 = Bendix PTIH-10-6P

6 = Hirschmann DIN 43650-C

D = 4-pin Binder Connector


M = 1 metres cable

P = 5 metres cable

R = 10 metres cable

Others available on request

■ Dimensions

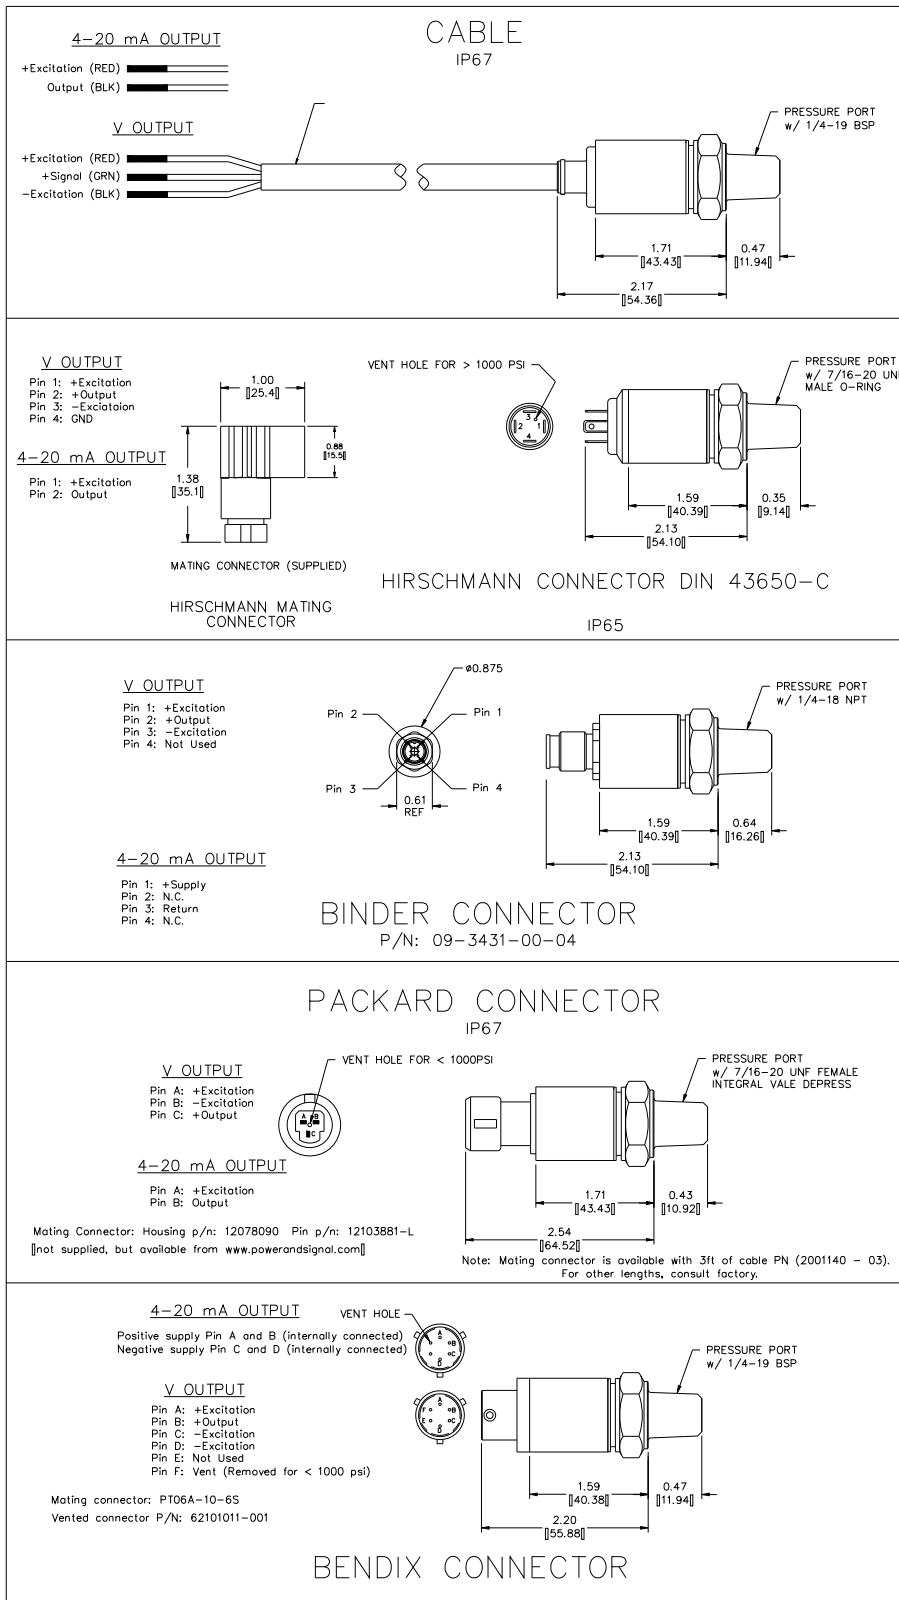


■ Output options

Code	Output	MIN	Supply(V)	
			TYP	MAX
3	0.5 – 4.5 V (ratiometric)	4.75	5	5.25
4	1 – 5 V	8		30
5	4 – 20 mA	9		30
6	0 – 5 V	8		30
7	0 – 10 V	15		30

■ Ordering Information

FPM5131-000005-300PG

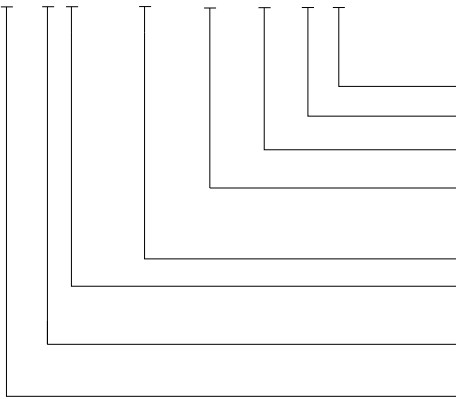

Type (G = Gage)

Units (P = psi, B = Bar)

Pressure Range (300 = 300, 05K = 5000, 3.5 = 3.5)

Pressure Port (2 = 1/4-19BSP, V = M14 x 1.5)

See Pressure Port Options Table)

Specials (nnnnn = Custom Drawing)

Connection (4 = Packard Metripak 150, R = 10 metres cable)

See Electrical Connection Options Table)

Output (3 = 0.5 to 4.5V, 4 = 1 - 5V, 5 = 4 - 20mA, 6 = 0 - 5V,

7 = 0 - 10V)

Model

ALTHERIS bv

Scheveningseweg 15
2517 KS DEN HAAG
The Netherlands

+31 (0)70 3924421

+31 (0)70 3644249

Offices in : Benelux | Germany | France | UK | Italy | USA

www.altheris.com

sales@altheris.nl

LEADERS IN SENSORS & HEAVY DUTY JOYSTICKS

ALTHERIS
SENSORS & CONTROLS