FCP12A
Conductive plastic (servomount)

Standard dimensions

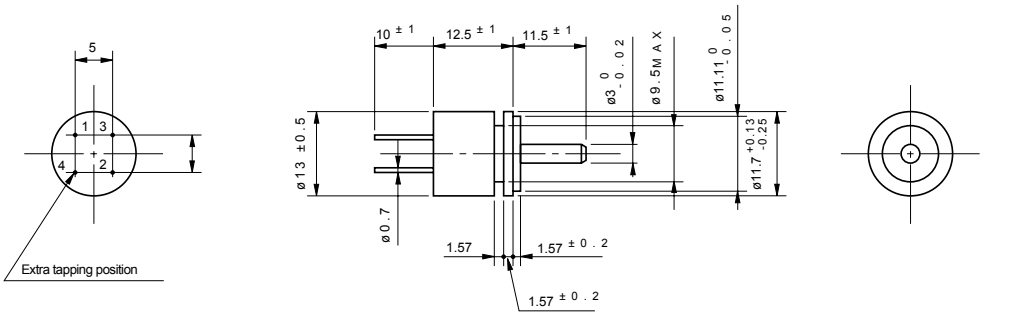

Model FCP12A

General Specifications

Standard Resistance Values:	1k, 2k, 5k, 10 k (Ω)
Special Practical Resistance Values:	500, 20k, 50k, 100k (Ω)
Total Resistance Tolerance:	Standard Class ±15% (L) Precision Class ±10% (K)
Independent Linearity Tolerance:	Standard Class ±2.0% Precision Class ±1.0%
Resolution:	Essentially infinite
Output Smoothness:	Within 0.1% against input voltage

Contact Resistance Variation:	Within 3% C.R.V.
Power Rating:	0.2W
Electrical Travel:	300º ±5º
Mechanical Travel:	360º (Endless)
Insulation Resistance:	Over 1,000MΩ at 500 V.D.C
Dielectric Strength:	1 minute at 500 V.A.C.
Starting Torque:	Within 1mN·m (10gf·cm)
Resistance Temperature Coefficient:	±400p.p.m./ºC
Mass:	Approx. 5g

Special Specifications Available

Extra taps (available up to 1 tap), shaft with front and rear extension (rear shaft with 1mm dia. and 10mm length), with stopper (rotating angle becomes 310º and stopper strength is 0.3N·m [3kgf·cm]), special electrical travel, shaft dia. (ø3.175mm) bushing with inch dimensions, special machining on the shaft.

LEADERS IN SENSORS & HEAVY DUTY JOYSTICKS

ALTHERIS bv
Scheveningseweg 15
2517 KS DEN HAAG
The Netherlands
☎ +31 (0)70 3924421
🖷 +31 (0)70 3644249
www.altheris.com
sales@altheris.nl
Offices in : Benelux | Germany | France | UK | Italy | USA

ALTHERIS SENSORS & CONTROLS

06/07/2011