



## VD3 Digital readouts

Digital readouts series VD3 can be employed in any industrial environment where it is necessary to measure voltage and currents, speeds, angular or linear positions and any physical or chemical magnitude that can be transformed into an electrical signal. There are several versions available, indeed:

<b>Vcc</b>	Voltage input, $\pm 1\div 5$ Vdc, $\pm 5\div 50$ Vdc, $\pm 50\div 250$ Vdc selectable
<b>LQRQ</b>	Input by potentiometer with settable scale range
<b>LQRQ 2P</b>	Input by 2 potentiometers with settable scale range
<b>Icc</b>	Direct current input 2 A max
<b>Ica</b>	Alternate current input 2 A max



Complying with standards

The display field can be chosen among three different solutions:


<b>3 digits</b>	<b>(999)</b>	<b>Readout type VD30</b>
<b>3 1/2 digits</b>	<b>(1999)</b>	<b>Readout type VD31</b>
<b>3 digits with steady zero</b>	<b>(9990)</b>	<b>Readout type VD300</b>

The number of decimal digits can be preset. The calibration is performed by means of a trimmer placed on the rear case; the series named **TF** avails on a trimmer on the front case to adjust the scale range.

### ■ Technical specifications

Supply	24 Vac or 115/230 Vac $\pm 10\%$ 50/60 Hz
Current consumption	3 VA
Display type	7-segment LEDs 12.7 mm high
Decimal digits	selectable
A/D conversion	by double ramp integrator
Readings/second	3
Operating temperature	0÷45° C
Max relative moisture	90% without damp
Case	DIN43700 standard
Resolution	VD30-VD300 $\pm 1000$ steps VD31 $\pm 2000$ steps
Accuracy	Vcc $\pm 0.05\%$ FS Icc $\pm 1\%$ FS - Ica $\pm 1.25\%$ FS LQRQ - LQRQ2P $\pm 0.05\%$ FS
Front case protection degree	IP54
Weight	0.4 Kg

### ■ Dimensions

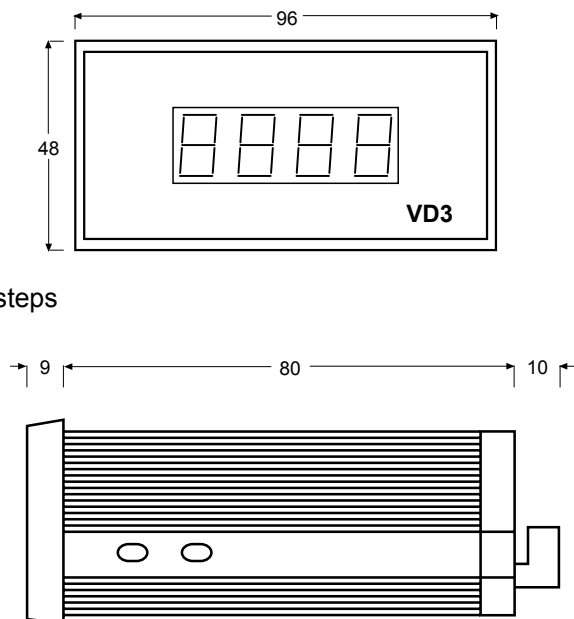

PANEL CUT OFF 91x44 mm

### ■ Application fields

Visualizers are commonly employed for different purposes. The following list includes the most widespread applications:

- Sample items control
- Tachometer
- Pressure indicator
- Sanding machine
- Metal forming machines
- Glass/marble working

### ALThERIS bv

Scheveningseweg 15  
 2517 KS DEN HAAG  
 The Netherlands

+31 (0)70 3924421

+31 (0)70 3644249

Offices in : Benelux | Germany | France | UK | Italy | USA

www.altheris.com

sales@altheris.nl

LEADERS IN SENSORS & HEAVY DUTY JOYSTICKS

**ALThERIS**  
 SENSORS & CONTROLS