





CLS-NA/CLS-NB


Compression Load Cell 2N~10kN

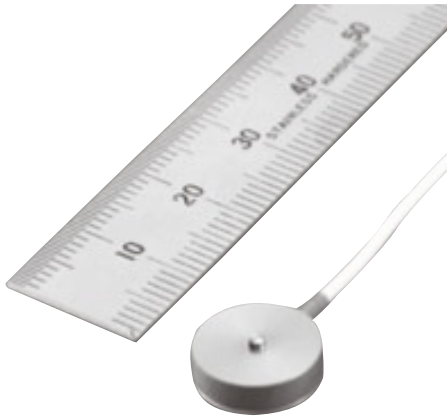


The CLS-NA and CLS-NB Load Cells are ultracompact load cells with capacities ranging from 2N to 10kN. They are widely used for measuring load distribution or loads in structural mockup testing and as a sensor for industrial machinery. Protection ratings : IP 53 equivalent IP 41 equivalent <CLS-2NA , CLS-5NA>

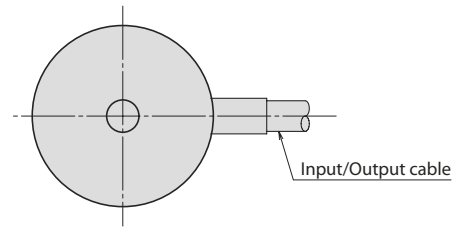

CLS-2NA 5KNB

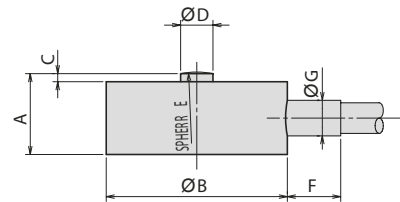

CLS-10KNB

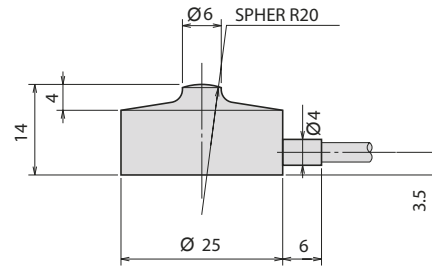

■ Dimensions

Type	A	B	C	D	E	F	G	Weight (g)
CLS-2NA	4	12	0.7	1.5	2	4	1.8	1
CLS-5NA	4	12	0.7	1.5	2	4	1.8	1
CLS-10NA	4	12	0.7	1.5	2	4	1.8	3
CLS-20NA	4	12	0.7	1.5	2	4	1.8	3
CLS-50NA	4	12	0.7	1.5	2	4	1.8	3
CLS-100NA	4	12	0.7	1.5	2	4	1.8	3
CLS-200NB	9	20	1	2.5	8	6	4	12
CLS-500NB	9	20	1	2.5	8	6	4	12
CLS-1KNB	9	20	1	2.5	8	6	4	12
CLS-2KNB	10	20	1.5	3	8	6	4	12
CLS-5KNB	12.5	25	2	4	10	6	4	40
CLS-10KNB	As per the figure							40

■ Specifications

Type	CLS-2NA	CLS-5NA	CLS-10NA	CLS-20NA	CLS-50NA	CLS-100NA	CLS-200NB	CLS-500NB	CLS-1KNB	CLS-2KNB	CLS-5KNB	CLS-10KNB
Capacity	2N	5N	20N	20N	50N	100N	200N	500N	1kN	2kN	5kN	10kN
Rated Output	1mV/V (2000×10 ⁻⁶ strain) ±20%						1.5mV/V (3000×10 ⁻⁶ strain) ±10%					
Non-linearity	0.1%RO			0.5%RO								
Hysteresis	0.1%RO			0.5%RO								
Temperature effect on zero	0.2%RO/°C			0.1%RO/°C								
Temperature effect on span	0.05%/											
Compensated temperature range	-10~+ 60											
Temperature range	-10~+ 60											
Over load	150%											
Ultimate overload rating	300%		500%				300%					
Input/output resistance	350Ω ± 2%						350Ω ± 1%					
Recommended exciting voltage	Less than 2V											
Allowable exciting voltage	5V											
Zero balance	200%RO		150%RO				100%RO					

Input/Output cable : CLS-NA : Ø 1.3m m 0.03mm² 4-core shielded vinyl cable 2m
 CLS-NB : Ø 3m m 0.05mm² 4-core shielded chloroprene cable 2m

LEADERS IN SENSORS & HEAVY DUTY JOYSTICKS

ALThERIS bv

Scheveningseweg 15
 2517 KS DEN HAAG
 The Netherlands

+31 (0)70 3924421

+31 (0)70 3644249

Offices in : Benelux | Germany | France | UK | Italy | USA

www.altheris.com

sales@altheris.nl

